

DS-7604NXI-K1/4P(USA-STD)/Alarm4+1/SP 4-ch PoE 1U K Series AcuSense 4K NVR



- Up to 4-ch IP camera inputs, plug & play with 4 power-over-Ethernet (PoE) interfaces
- H.265+/H.265/H.264+/H.264 video formats
- Up to 1-ch@12 MP or 2-ch@8 MP or 5-ch@4 MP or 10-ch@1080p decoding capacity
- Up to 40 Mbps incoming bandwidth
- Adopt Hikvision Acusense technology to minimize manual effort and security costs

▪ Specification

Model		DS-7604NXI-K1/4P(USA-STD)/Alarm4+1/SP
Intelligent Analytics	AI by Device	Facial recognition, perimeter protection, motion detection 2.0
	AI by Camera	Facial recognition, perimeter protection, throwing objects from building, motion detection 2.0, ANPR, VCA
Facial Recognition	Face Attributes	N/A
	Facial Detection and Analytics	Face picture comparison, human face capture, face picture search
	Face Picture Library	
	Facial Detection and Analytics Performance	
	Face Picture Comparison (Captured from Camera)	2-ch
Motion Detection 2.0	By Device	All channels, 4 MP (when enhanced SVC mode is enabled, up to 8 MP) video analysis for human and vehicle recognition to reduce false alarm
	By Camera	All channels
Perimeter Protection	By Device	1-ch, 4 MP (HD network camera, H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm
	By Camera	All channels
Video and Audio	IP Video Input	4-ch
	Incoming Bandwidth	40 Mbps
	Outgoing Bandwidth	80 Mbps
	HDMI Output	1-ch, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz
	VGA Output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz
	Video Output Mode	HDMI1/VGA simultaneous output
	CVBS Output	N/A
	Audio Output	1-ch, RCA (Linear, 1 KΩ)
	Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input)
Decoding	Decoding Format	H.265/H.265+/H.264+/H.264
	Recording Resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	Synchronous Playback	4-ch

	Decoding Capability	AI on: 1-ch@12 MP (30 fps)/1-ch@8 MP (30 fps)/3-ch@4 MP (30 fps)/6-ch@1080p (30 fps) AI off: 1-ch@12 MP (30 fps)/2-ch@8 MP (30 fps)/5-ch@4 MP (30 fps)/10-ch@1080p (30 fps)
	Stream Type	Video, Video & Audio
	Audio Compression	G.711ulaw/G.711alaw/G.722/G.726/AAC
Network	Remote Connection	128
	API	ONVIF (profile S/G); SDK; ISAPI
	Compatible Browser	IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version
	Network Protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
	Network Interface	1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
PoE	Interface	4, RJ-45 10/100 Mbps self-adaptive Ethernet interface
	Power	≤ 50 W
	Standard	IEEE 802.3af/at
Auxiliary Interface	SATA	1 SATA interface
	Capacity	Up to 10 TB capacity for each HDD
	USB Interface	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 2.0
	Alarm In/Out	
General	GUI Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian
	Power Supply	48 VDC, 1.35 A
	Consumption	≤ 10 W (without HDD and PoE off)
	Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
	Working Humidity	10% to 90%
	Dimension (W × D × H)	320 mm × 240 mm × 48 mm (12.6" × 9.4" × 1.9")
	Weight	≤ 1 kg (without HDD, 2.2 lb.)
Certification	CE	EN 55032: 2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4, EN 55035: 2017
	Obtained Certification	

*Note:

*Alarm in/out can be optional for certain models. If you select a device model with "/Alarm4+1", then the device will have 4 alarm inputs and 1 alarm outputs.

▪ Function

Smart Function

Smart search for the selected area in the video, and smart playback to improve the playback efficiency

Professional and Reliability

H.265+ compression effectively reduces the storage space by up to 75%

Adopt stream over TLS encryption technology which provides more secure stream transmission service

HD Video Output

Provide simultaneous HDMI and VGA outputs

HDMI video output at up to 4K resolution

Storage and Playback

Up to 1 SATA interface for HDD connection (up to 10 TB)

4-ch synchronous playback

Network & Ethernet Access


4 independent PoE network interfaces

1 self-adaptive 10/100 Mbps Ethernet interface

Hik-Connect for easy network management

Physical Interface


No.	Description	No.	Description
1	Network interfaces with PoE function	7	USB interface
2	LAN network interface	8	Power supply
3	AUDIO OUT	9	Power switch
4	AUDIO IN	10	GND
5	HDMI interface	11	ALARM IN
6	VGA interface	12	ALARM OUT

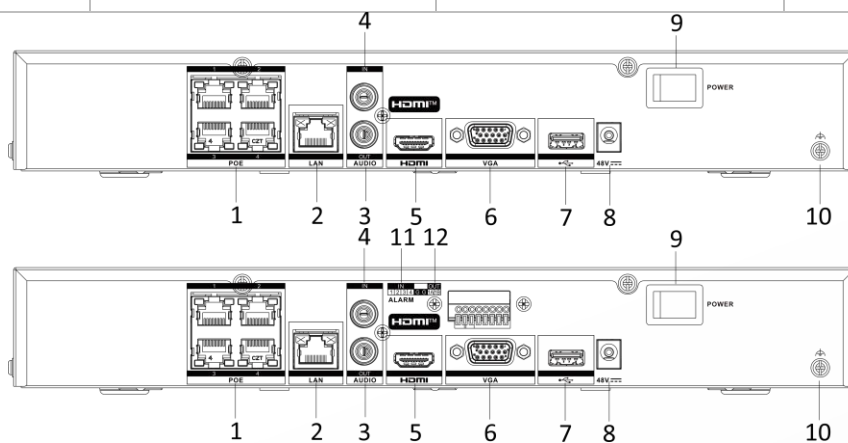


Available Model

DS-7604NXI-K1/4P(USA-STD)/Alarm4+1/SP

Dimension

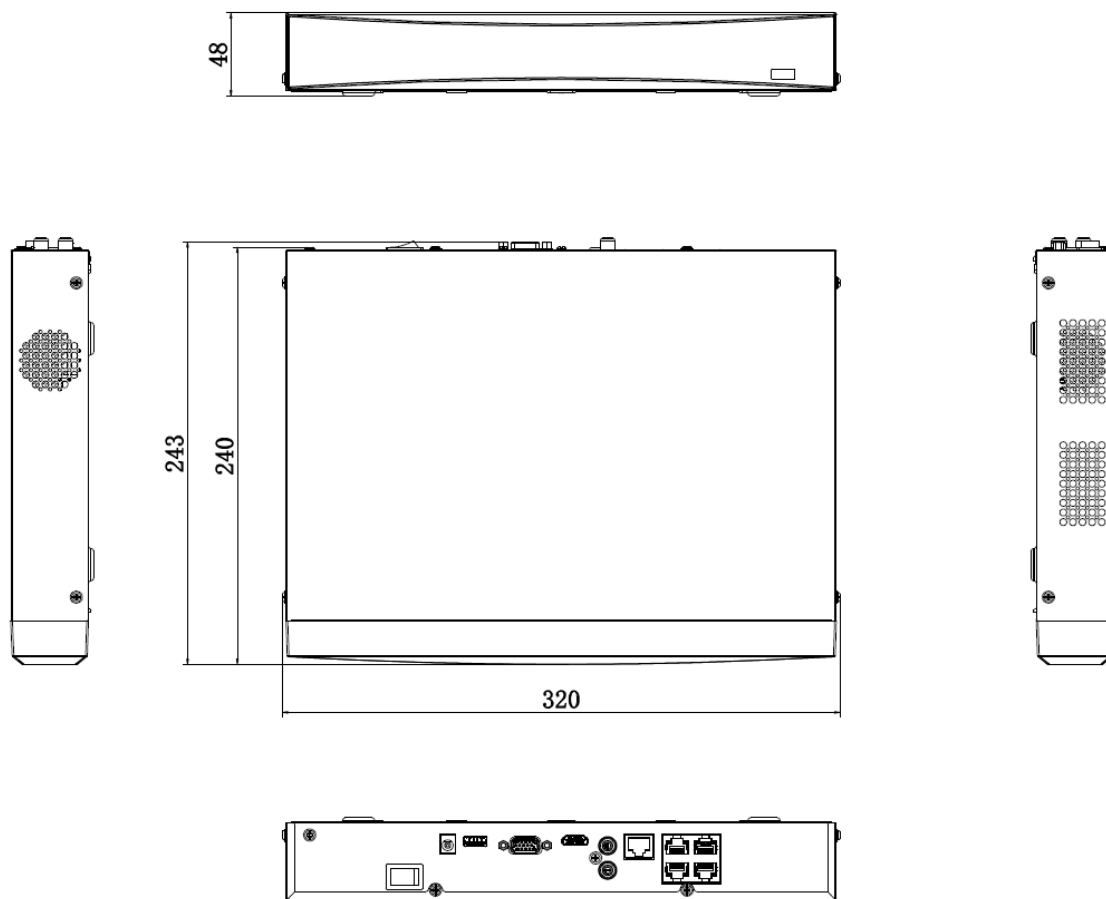

scale/1:1;Unit/mm

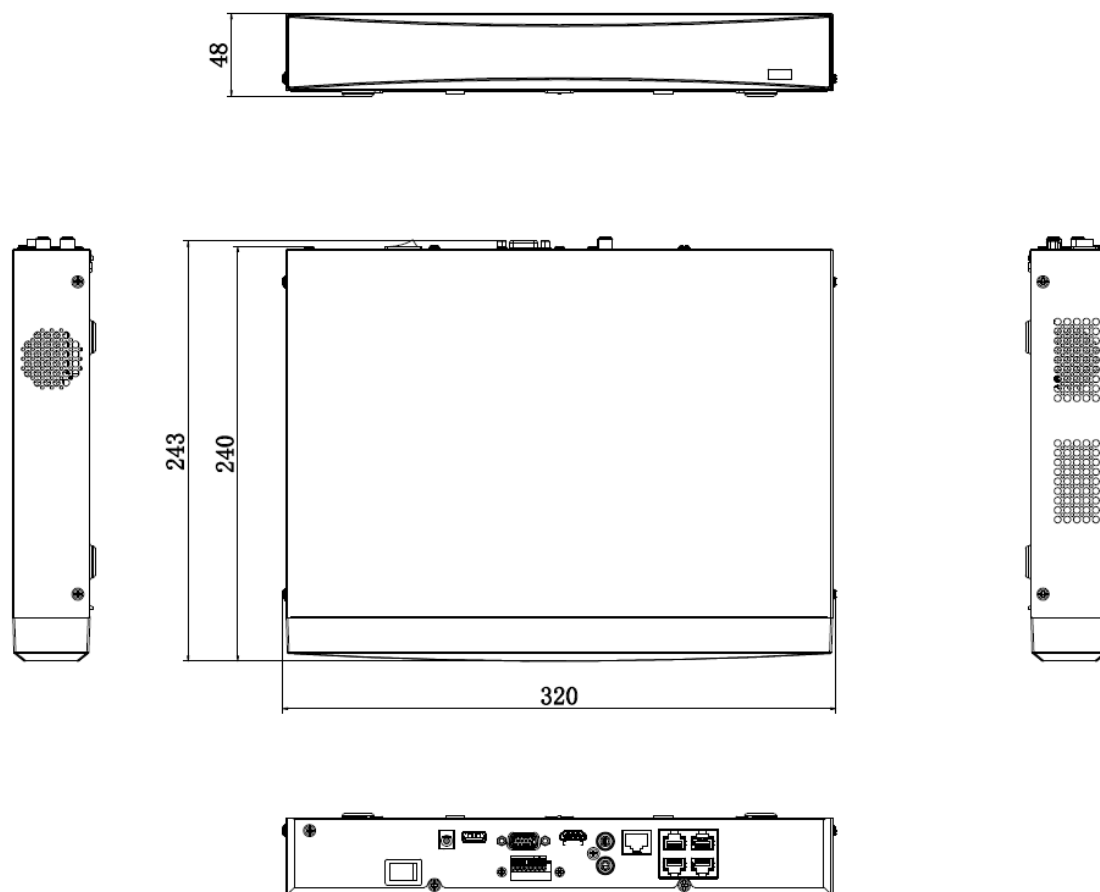

scale/1:1;Unit/mm

See Far, Go Further



www.hikvision.com
support@hikvision.com

